


KanaChem 300 (300GR/EPDM)

All weather suction and discharge hose

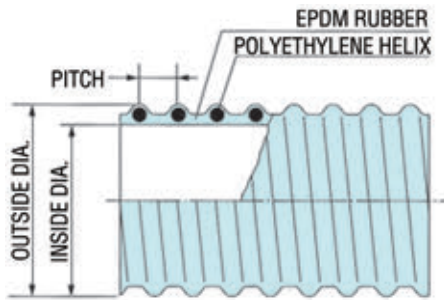

Suction & Discharge
Cold Weather/Flexible
Heavy-Duty
Abrasion Resistance
Petroleum
Food Grade
Duct
Specialty
Accessories

SPECIFICATIONS

Temp. Range: -40°F to 140°F

Applications: Heavy-duty liquid suction hose for use in construction dewatering, liquid waste, cesspool cleaning, septic handling, agricultural applications and marine use.

Construction: EPDM rubber, polyethylene helix, smooth bore, corrugated O.D.

Features: Lightweight and flexible. External helix provides for easy drag. Resistant to agricultural chemicals.

AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
1	1.34	0.30	1.9	50	29.8	0.23	100
1-1/4	1.7	0.33	3.2	50	29.8	0.34	100
1-1/2	2.0	0.35	3.2	50	29.8	0.40	100
2	2.5	0.39	5.2	50	29.8	0.67	100
2-1/2	3.1	0.56	5.6	50	29.8	0.92	100
3	3.6	0.59	7.1	43	29.8	1.10	100
4	4.7	0.65	11.0	38	29.8	1.84	100
6	6.9	0.87	20.0	23	28.0	3.07	60,100



* Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. **Kanaflex will not be responsible for damage to hose due to over flexing.**